

GASARC™

AN ESAB® BRAND

CHEM MASTER SGD6200 SERIES

6.0 Purity Two Stage Stainless Steel Piston Differential Autochange Gas Control Panel

The Chem Master SGD6200 series two stage differential autochange control panels are designed for primary pressure gas control of corrosive, toxic or high purity gases up to grade 6.0 purity (99.9999%), on gas distribution systems where constant delivery pressure is required.

- **SGD6241 Series** | Two Stage Twin Cylinder Piston Differential Autochange Gas Control Panel, FKM Seal
- **SGD6242 Series** | Two Stage Twin Cylinder Piston Differential Autochange Gas Control Panel, EPDM Seal



★ FEATURES

- High pressure isolation valves
- High pressure purge facility
- Two stage pressure regulation
- Process line isolation valve
- Encapsulated seat design
- Twin cylinder configuration

📄 MATERIALS

Body	316L Stainless Steel
Bonnet	Nickel Plated Brass Barstock
Piston	316L Stainless Steel
Seal	FKM / EPDM
Seat	PCTFE
Filter	10 Micron 316L Stainless Steel


👍 SPECIFICATION

Maximum Inlet Pressure	60 bar (870 PSI) / 300 bar (4350 PSI)*
Delivery Pressure Range	20 bar (300 PSI) / 50 bar (725 PSI)
Gauge	50mm (2") Diameter
Ports	1/4" NPT Female
Temperature Range	-20° C to +60° C (-4° F to +140° F)
Flow Coefficient (Cv)	0.078
Helium Leak Integrity	1x10 ⁻⁹ mbar l/s
Weight	8.00kg (17.64 lbs)****


* Subject to cylinder connection. *** Nace and 3.1 material certificates available on request. Please contact the sales office for further information. **** Subject to final configuration.

✓ FLOW PERFORMANCE


300 bar Inlet Pressure @ 21°C

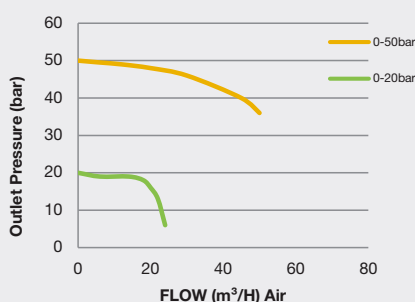


200 bar Inlet Pressure @ 21°C

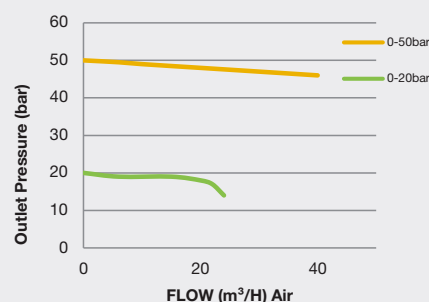


60 bar Inlet Pressure @ 21°C

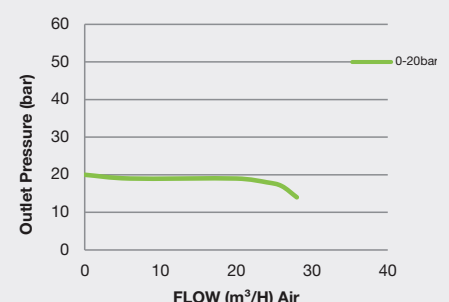

DIMENSIONS

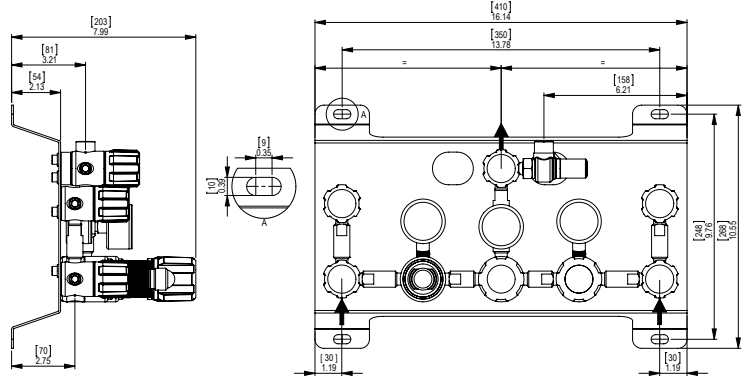

PROCESS & INSTRUMENTATION

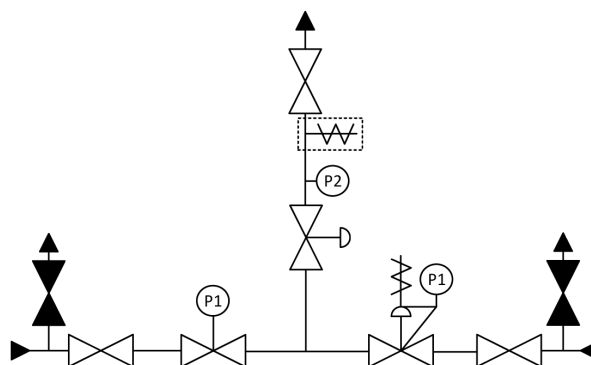

- Isolation Valve
- Isolation Valve (Closed)
- Fixed Pressure Regulator with P1 Pressure Gauge
- Adjustable Pressure Regulator with P1 Pressure Gauge
- Adjustable Pressure Regulator with Pressure Relief Valve
- P2 Pressure Gauge
- Pressure Relief Valve
- Denotes a Configurable Option

Model No. Selector Guide

Product Type	Inlet Pressure	Outlet Pressure	Inlet Pressure Gauge	Outlet Pressure Gauge	Inlet Connection	Outlet Connection	Options	
SGD6241	02 60 bar / 870 PSI	07 -1 - 20 bar / 300 PSIG	00 No Gauge Fitted	00 No Gauge Fitted	000 No Inlet Fitted	00 No Outlet Fitted	A No Options Selected	
SGD6242	04 300 bar / 4350 PSI	10 -1 - 50 bar / 725 PSIG	01 bar/PSI	01 bar/PSI	001 1/8 Stainless Steel Compression	01 1/8 Stainless Steel Compression	F Bonnet Vent Capture Kit	
			11 0 - 100 bar / 1450 PSI	02 bar/PSI Contact Gauge	02 bar/PSI 3.1 Cert (stainless steel only)***	002 1/4 Stainless Steel Compression	02 1/4 Stainless Steel Compression	G Helium Test Certificate
			03 bar/PSI 3.1 Cert (stainless steel only)***	03 bar/PSI 3.1 Cert (stainless steel only)***	003 6mm Stainless Steel Compression	03 6mm Stainless Steel Compression	H 3.1 Material Certificate***	
			04 bar/PSI Contact Gauge 3.1 Cert (stainless steel only)***	04 bar/PSI Contact Gauge 3.1 Cert (stainless steel only)***	004 1/4 NPT Male	04 1/4 NPT Male	J NACE Certificate***	
							K Certificate of Conformity	
							M CO2 Burst Disc	
							P Calibration / Pressure Test Certificate	
							R Fitted Pipeline Pressure Relief Valve, FKM Seal	
							S Fitted Pipeline Pressure Relief Valve, EPDM Seal	
							X Special Instruction	