

4.5 Purity



The Tech Master VAA090 Series Isolation Valves are designed for use in gas control of noncorrosive or toxic, technical grade gases up to 4.5 purity (99.995%).

- VAA09040 | High Pressure Isolation Valve, FKM Seal
- VAA09041 | High Pressure Isolation Valve, **EPDM Seal**
- VAA09042 | High Pressure Purge/Vent/Waste Valve, FKM Seal
- VAA09043 | High Pressure Purge/Vent/Waste Valve, EPDM Seal



- Four point configuration (3 Inlet & 1 Outlet)
- Maintenance free design
- Tested for high pressure Oxygen use
- On / Off display (by green / red visual indicator)
- Rear Mounting for Panels
- 1/4 NPT female ports
- Mounting bracket (optional)

MATERIAL MATERIAL

Body Brass Barstock Seals FKM / EPDM Valve Seat Polyamide (Nylon®)


SPECIFICATION

300 bar (4350 PSI) Maximum Pressure Service ■ Weight 0.45 kg (0.99 lb)

MODEL NO. SELECTOR GUIDE

Part No.	Inlet Pressure Bar [PSI]	Inlet Connection	Outlet Connection	Seal Type
VAA09040	300 [4350]	1/4 NPT Female	1/4 NPT Female	FKM
VAA09041	300 [4350]	1/4 NPT Female	1/4 NPT Female	EPDM
VAA09042	300 [4350]	1/4 NPT Female	1/4 NPT Female	FKM
VAA09043	300 [4350]	1/4 NPT Female	1/4 NPT Female	EPDM

■ GCP37525 | Mounting Bracket (optional accessory, needs to be ordered separately)

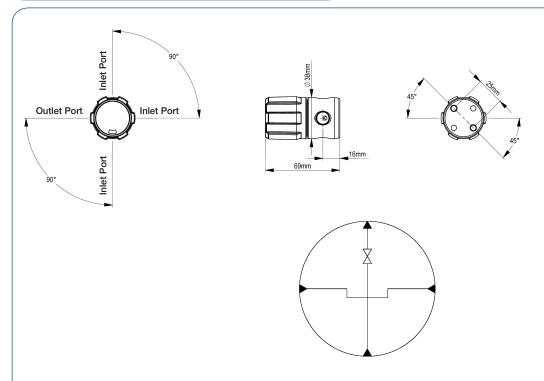

Isolation Valve - Mounting Bracket (optional accessory, needs to be ordered separately)

